


Input voltage	14V to 28V
Extra features	Smart audio
Power supply	5V Camera @ under 350mA max.
Output power	25MW/200MW/500MW/1000MW/3W
Antenna connector	SMA
Cable connector	JST, 6pin
Dimensions	47 (W)x36 (D) mm, 41.5 x 30.5mm (hole)
Weight	34g (excluding antenna)
Kit contents	1x VTX,1x cable

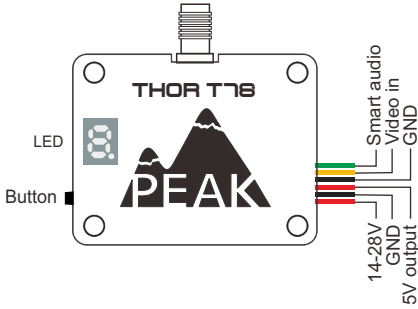

THOR T78

Key features

- Support Smart audio
- 25/200/500/1000/3000mW power switchable
- Built-in cooling fan
- OSD configuration using smart audio
- 14-28V input with 5V output

Button control Channel select mode

One button is used to set channel, band and power.

Channel Select

Short press to change 8 channels.

Band Select

Press the button for 2 seconds, LED will flicker an letter and a dot, then short press to change 5 band from A-b-E-F-r

Power Select

Press the button for 3 seconds, LED will flicker an number and a dot, then short press to change 5 power levels.

After setting, led will display letter-number-number and a dot, representing band-channel-power level

For example:



representing 7540 200mW

Pit Mode

The VTX is fully accessible via smart audio. It supports Pit Mode.

Frequency Table

Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band A	7200	7220	7240	7260	7280	7300	7320	7340
Band b	7360	7380	7400	7420	7440	7460	7480	7500
Band E	7520	7540	7560	7580	7600	7620	7640	7680
Band F	7700	7720	7740	7760	7780	7800	7820	7840
Band r	7860	7880	7900	7920	7940	7960	7980	8000

NOTICE:

**BE CAREFUL NOT TO BURN YOUR FINGERS.
PLUG THE ANTENNA BEFORE POWERING THE VTX.
DO NOT REMOVE COOLING FAN.**