




规格参数

型号	Eclipse Lite 006
探测器类型	氧化钒非制冷红外焦平面探测器
分辨率	640x512
波长范围	8-14 μ m
光圈	F1.0
焦距	9.1mm
FOV	48.3°(H)*38.6°(V)*66°(D)
帧率	50Hz
功耗	<1.5w
制式	PAL
宽电压输入	9V-24V
工作温度	-20°C~60°C

规格尺寸

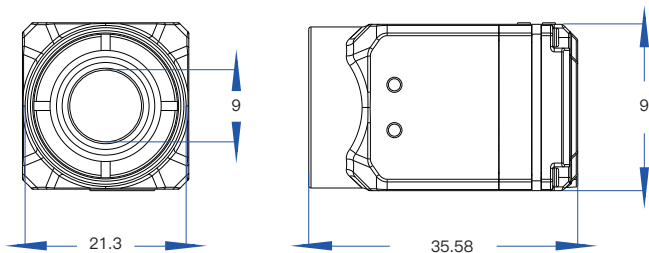


单位: mm



Specification Parameters

Model	Eclipse Lite 006
Detector Type	Uncooled Vanadium Oxide
Resolution	640x512
Wavelength Range	8-14 μ m
F.NO	F1.0
Focal Length	9.1mm
FOV	48.3°(H)*38.6°(V)*66°(D)
Frame Rate	50Hz
Power Consumption	<1.5w
Video Interface	PAL
Supply Voltage	9V-24V
Operating Temperature	-20°C-60°C

Dimensions

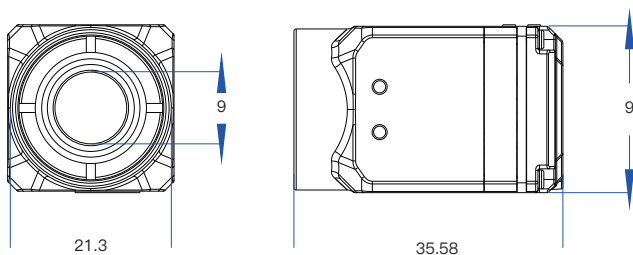

Unit: mm