



THOR T67

Key features

- Support Smart audio
- 25/200/500/1000/3000mW power switchable
- Built-in cooling fan
- OSD configuration using smart audio
- 9-28V input with 5V output

Button control Channel select mode

One button is used to set channel, band and power.

Channel Select

Short press to change 8 channels.

Band Select

Press the button for 2 seconds, LED will flicker an letter, then short press to change 8 band from A-b-E-F-r-P-H-U

Power Select

Press the button for 3 seconds, LED will flicker an number quickly, then short press to change 5 power levels.


After setting, led will display letter-number-number flickering twice, representing band-channel-power level

For example:



representing 6450 200mW

Input voltage	9V to 28V
Extra features	Smart audio
Power supply	5V Camera @ under 350mA max.
Output power	25/200/500/1000/3000mW
Antenna connector	SMA
Cable connector	JST, 6pin
Dimensions	47 (W)x36 (D) mm, 41.5 x 30.5mm (hole)
Weight	34g (excluding antenna)
Kit contents	1x VTX, 1x cable

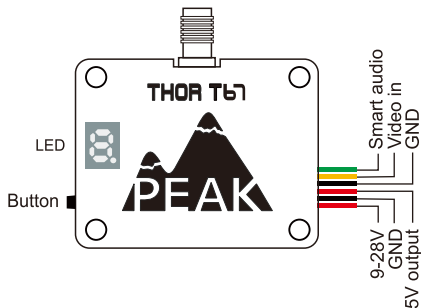

Pit Mode

The VTX is fully accessible via smart audio. It supports Pit Mode.

Frequency Table

Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band A	6110	6130	6150	6170	6190	6210	6230	6250
Band b	6270	6290	6310	6330	6350	6370	6390	6410
Band E	6430	6450	6470	6490	6510	6530	6550	6570
Band F	6590	6610	6630	6650	6670	6690	6710	6730
Band r	6750	6770	6790	6810	6830	6850	6870	6890
Band P	6910	6930	6950	6970	6990	7010	7030	7050
Band H	7070	7090	7110	7130	7150	7170	7190	7210
Band U	6115	6265	6425	6585	6745	6905	7065	7185

NOTICE:

**BE CAREFUL NOT TO BURN YOUR FINGERS.
PLUG THE ANTENNA BEFORE POWERING THE VTX.
DO NOT REMOVE COOLING FAN.**