


PRODUCT SPECIFICATION

| | |
|-------------------|--|
| Input voltage | 14.6V to 28V |
| Extra features | Smart audio |
| Power supply | 5V Camera @ under 500mA max. |
| Output power | 25/1000/3000/5000/8000mW |
| Microphone | Not supported |
| Antenna connector | SMA |
| Cable connector | JST, 6pin |
| Dimensions | 36 (W)x36 (D) mm, 30.5 x 30.5mm (hole) |
| Weight | 25g (excluding antenna) |
| Kit contents | 1x VTX, 1x cable, 1x pigtail |



**Ultra Long Range
All Channels Version**

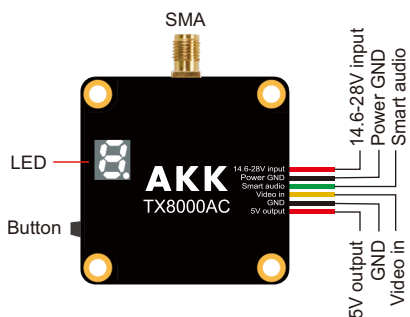

TX8000AC

PRODUCT SPECIFICATION

Key features

- Support Smart audio
- 25/1000/3000/5000/8000mW power switchable
- Built-in cooling fan
- OSD configuration using smart audio
- 14.6-28V input with 5V output

Button control Channel select mode

One button is used to set channel, band and power.

Channel Select

Short press to change 8 channels.

Band Select

Press the button for 2 seconds, LED will flicker an letter, then short press to change 12 band from A-b-E-F-r-P-L-U-O-H-T-n

Power Select

Press the button for 3 seconds, LED will flicker an number quickly, then short press to change 5 power levels.

After setting, led will display letter-number-number flickering twice, representing band-channel-power level

For example:



PRODUCT SPECIFICATION

Slow power on

The VTX will wait for 3 seconds before turning on power amplifier. The 3 seconds slow power on will protect the VTX from being burned by maximum instantaneous power.

Pit Mode

The VTX is fully accessible via smart audio. It supports Pit Mode.

| Band | CH1 | CH2 | CH3 | CH4 | CH5 | CH6 | CH7 | CH8 |
|--------|------|------|------|------|------|------|------|------|
| Band A | 5474 | 5492 | 5510 | 5528 | 5546 | 5564 | 5582 | 5600 |
| Band b | 5362 | 5399 | 5436 | 5473 | 5510 | 5547 | 5584 | 5621 |
| Band E | 5325 | 5348 | 5366 | 5384 | 5402 | 5420 | 5438 | 5456 |
| Band F | 5129 | 5159 | 5189 | 5219 | 5249 | 5279 | 5309 | 5339 |
| Band r | 4990 | 5020 | 5050 | 5080 | 5110 | 5140 | 5170 | 5200 |
| Band P | 5333 | 5373 | 5413 | 5453 | 5493 | 5533 | 5573 | 5613 |
| Band L | 4900 | 4940 | 4921 | 4958 | 4995 | 5032 | 5069 | 5099 |
| Band U | 5960 | 5980 | 6000 | 6020 | 6030 | 6040 | 6050 | 6060 |
| Band O | 5865 | 5845 | 5825 | 5805 | 5785 | 5765 | 5745 | 5725 |
| Band H | 5733 | 5752 | 5771 | 5790 | 5809 | 5828 | 5847 | 5866 |
| Band T | 5705 | 5685 | 5665 | 5645 | 5885 | 5905 | 5925 | 5945 |
| Band n | 5740 | 5760 | 5780 | 5800 | 5820 | 5840 | 5860 | 5880 |

HOT CAUTION
BE CAREFUL NOT TO BURN YOUR FINGERS

PLUG THE ANTENNA BEFORE POWERING THE VTX
DO NOT REMOVE COOLING FAN