


## Features


- A high-performance receiver unit deeply optimized for the 7G band, achieving sensitivity down to -95 dBm across the 6100–7200 MHz bandwidth.
- Integrated with 64 commonly used frequency points in the 7G band, enabling quick operation via knobs and digital displays.
- A rugged aluminum alloy housing provides robust protection.
- Includes a broadband receiving antenna.

## Diagram & Operations

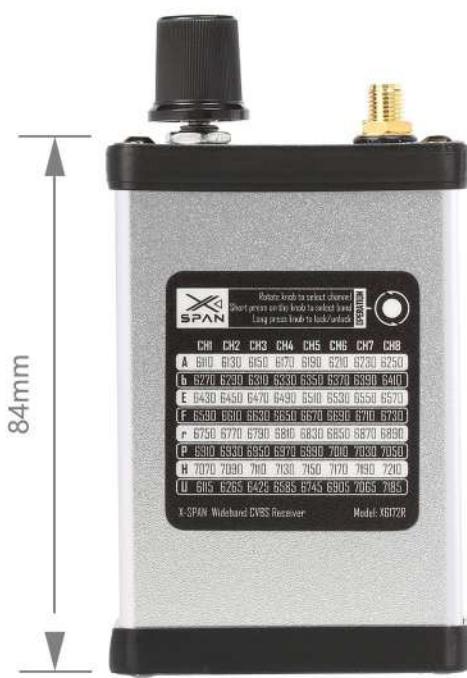

The DVR status LED is always on when powering up and the DVR is in standby mode. Press the REC button, the DVR light blinks and recording starts.

Press and hold the knob, the decimal point lights up and the receiver is locked to prevent misuse. Long press the knob again, the decimal point goes out, unlocking the operation.



Twist the knob to set the channel and the channel will cycle through CH1-CH8.

Press the knob to switch between band A and band B



## Specification

### RUSHFPV 6.1GHz-7.2GHz VRX Module

Video Output CVBS NTSC/PAL

Frequency 6100-7200MHz 64CH

Sensitivity > -95dBm

DC Input 7-30V

Connector SMA

Operating Temp. -10°C-+60 C

Dimension L58 X W27 X H104mm

Weight 94g

### RUSHFPV 6.0GHz-7.5GHz ANTENNA

Polarization Linear

Bandwidth 6000MHz-7500MHz

Radiation pattern Omni-directional

Gain ≤4.6dBi

V.S.W.R ≤1.5

Connector SMA Male

Dimension H150 X W23mm

Weight 9g