


PRODUCT SPECIFICATION

Input voltage	14V to 28V
Extra features	4W
Power supply	5V Camera @ under 180mA
Output power	25/100/200/1000/4000mW
Microphone	Not supported
Antenna connector	SMA
Cable connector	JST, 6pin
Kit contents	1x VTX, 1x cable, 1x RF extension cable

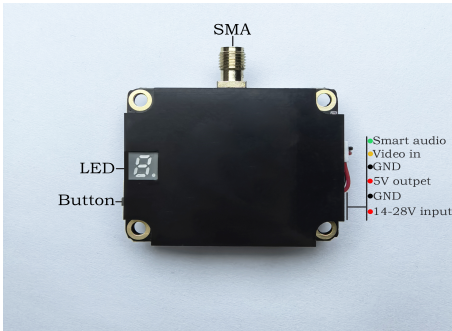

TX6704

PRODUCT SPECIFICATION

Key features

- 25/100/200/1000/4000mW power switchable
- Built-in cooling fan
- 14-28V input with 5V output

Button control Channel select mode

One button is used to set channel, band and power.

Channel Select

Short press to change 8 channels.

Band Select

Press the button for 2 seconds, LED will flicker an letter and a dot, then short press to change 5 band from

A-b-E-F-r-P-H-U

Power Select

Press the button for 3 seconds, LED will flicker an number and a dot, then short press to change 5 power levels.

After setting, led will display letter-number-number and a dot, representing band-channel-power level

For example:



representing 6150 25mW

PRODUCT SPECIFICATION

Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band A	6110	6130	6150	6170	6190	6210	6230	6250
Band b	6270	6290	6310	6330	6350	6370	6390	6410
Band E	6430	6450	6470	6490	6510	6530	6550	6570
Band F	6590	6610	6630	6650	6670	6690	6710	6730
Band r	6750	6770	6790	6810	6830	6850	6870	6890
Band P	6910	6930	6950	6970	6990	7010	7030	7050
Band H	7070	7090	7110	7130	7150	7170	7190	7210
Band U	6115	6265	6425	6585	6745	6905	7065	7185

HOT CAUTION

**BE CAREFUL NOT TO BURN YOUR FINGERS
PLUG THE ANTENNA BEFORE POWERING THE VTX
DO NOT REMOVE COOLING FAN**