

MAPLE WIRELESS


高增益圆极化天线

38mm 1/4-20 (0) 40mm®

Easy installation, effortless operation.





Dual Circular Polarization (LHCP & RHCP) with Selectable Polarization

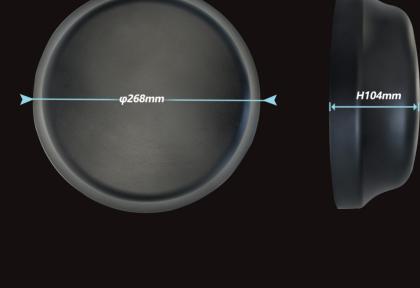



30 Polar plot

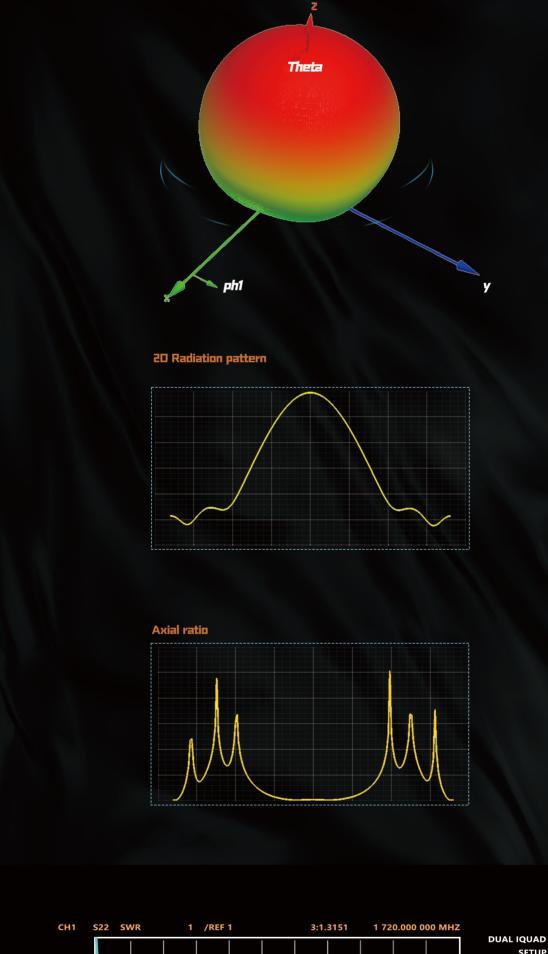

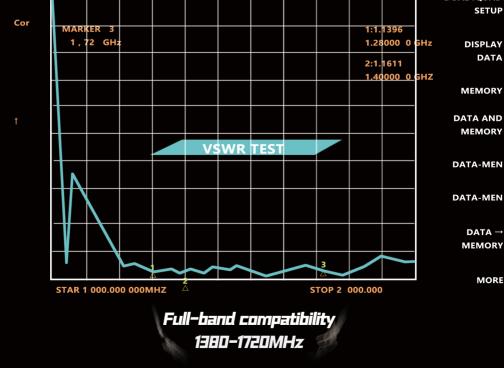

SETUP

DATA

MORE

1080-1360MHz 1380-1720MHz Frequency: Frequency: Gain: 10 dBi Gain: 10.5dBi SMA SMA

Product name: 1.5G Circularly Polarization Antenna

485g

Half power bema:65° E-Plane 65°H-Plane Half power beam: 60° E-Plane 60°H-Plane φ268 (mm) H104(mm) Size (mm) :

Size (mm) :  $\phi 268$  (mm) H104(mm) Weight (g): 515g Weight (g):

Product name: 1.2G Circularly Polarization Antenna