



Input voltage	12V
Antenna connector	SMA
Dimensions	68x78x15mm
Weight	69g (excluding antenna)
Kit contents	1xVRX,1x AV output cable, 1xPower cable

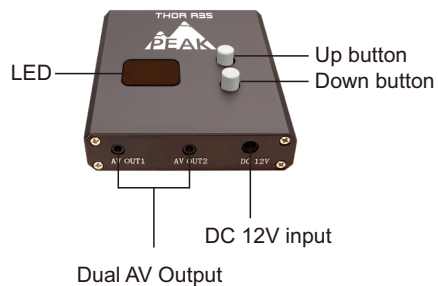

THOR R3S

Button control Channel select mode

Up button is used to set band,
Down button is used to set channel.



Frequency Table

Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band A	3000	3030	3060	3090	3120	3150	3180	3210
Band b	3240	3270	3300	3330	3370	3400	3430	3470
Band E	3500	3530	3560	3590	3620	3650	3680	3710
Band F	3740	3770	3800	3830	3860	3890	3920	3950
Band r	3980	4010	4040	4070	4100	4130	4160	4190
Band P	4220	4250	4280	4310	4340	4370	4400	4430
Band H	4470	4500	4530	4560	4590	4620	4650	4680
Band U	4710	4740	4770	4812	4839	4872	4911	4938